

CO-AX INDICATOR

Features:

- Restraining rod.
- Counterpoint feeler.
- The CO-AX indicator provides a simplified method for centering a workpiece or fixture on horizontal or vertical machines, external or internal diameters.
- Indicator dial remains stationary while the machine spindle rotates.
- Operates at any angle from horizontal to vertical without any change, and from internal to external by simply changing the feeler.
- Walking around the machine is unnecessary, no mirrors required, or no contortions. Exact chucking not needed.
- Graduation: 0.01mm(JD21-0002), 0.0005"(JD21-0001, JD21-0003).



JD21-0001



JD21-0002



JD21-0003



JD21-0003



Item	Range of Per Rev.	Length of Straight Feler	Length of Center Point Feler	Length of Curved Feler	Price
White Face JD21-0001	0-0.15"	2", 4", 6"	2"	2", 4", 6"	\$180.00/SET
Yellow Face JD21-0003	0-0.15"	2", 4", 6"	2"	2", 4", 6"	\$180.00/SET
JD21-0002	0-3mm	50, 101, 152mm	50mm	50, 101, 152mm	\$180.00/SET

ELECTRONIC MAGNETIC Z AXIS SETTER 2" HEIGHT

Features:

- Accuracy 0.0002".
- Adjustable height 2".
- Magnetic base.
- 360 degree red lamp lights up when touched.
- Introduce the tool to the unit until the light is on, then draw back until light is off.
- Adjust the height if needed with preset two all-in screws on the side of the unit and turn the top grey part of the unit alongside the center threaded body.
- When presetting diameter, rotate slowly for higher precision.
- Do not take a caliper for presetting unit. Only use gage blocks and preset gauges.

Item # 0805-4015

\$216.00/PC



Z AXIS ZERO SETTER 0-0.1"

Features:

- Graduation: 0.001"
- Accuracy and repeatability: 0.0004"
- Height holding: 2"
- Length: 2"
- Square: 2.05"
- Square base, inside indicator, & magnetic

Item # 0801-0301

\$146.00/PC



PRECISION MAGNETIC Z AXIS SETTER

Features:

- Mechanical zero-setting instrument for CNC machine centers.
- Fast and sure establishing of "0" reference point.
- Magnetic base (2124-2002 magnetic base with switch).
- No averaging of several spindle approaches is required.
- Positive alignment of zero position.
- Spring loaded setting face.

Item	Height	Range	Resolution	Price
2124-2001	2"	0-0.1"	0.0005"	\$143.00/PC
2124-2002	4"	0-0.1"	0.001"	\$186.00/PC



2124-2001




2124-2002

IP65 ELECTRONIC DIGITAL HEIGHT PRESETTER, 2" X 0.00005"

Features:

- Inductive measurement system.
- Protection level: IP65.
- Magnetic base, super adhesion.
- 3V lithium battery CR2032, battery life > 1 year.
- Light indicating when LCD "0.000".
- Range: 0-0.12" (2.5mm).
- Power on automatically when the measuring surface moving.
- Aluminum fitting case.

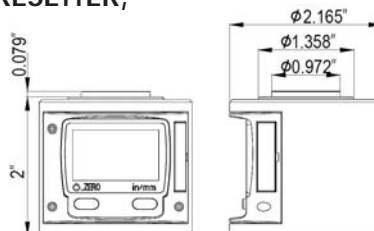

ISO9001

IP65

Item	Range	Resolution	Accuracy	Repeatability	Price
0805-4016	0-0.12"/0-2.5mm	0.00005"/0.001mm	±0.0002"/0.005mm	0.0001"/0.003mm	\$180.00/PC